A central outdoor sports cluster faces both halls; gardens and water occupy both park wings.

Expansion design study | 5000 Northfield Lane, Spring Hill, Tennessee | parcel relation unverified

Halls	2 x 100,000 SF = 200,000 SF total
Structural module	2 x 150 ft nominal bays per hall; 10 x 33.333 ft longitudinal grid
Clear height	37 ft / 11.278 m target to lowest roof members
Court program	16 indoor + 8 outdoor pickleball; indoor/outdoor basketball; indoor six-a-side; 2 outdoor soccer pitches
Support program	5,000 SF office; 1,000 SF secure entrance; kitchen; 250 actual dining seats; gym/coaching/physio; batting cage
Parking	1,500 physical stalls | surface only | 30 accessible, 6 van
Outdoor land	30.000 gross acres separate from hall and parking footprints
Whole design envelope	49.470 acres, assumed design envelope
Stage	Permanent covered stage and 8,000 guest TARGET; occupancy/egress unapproved
Power	20 MW TARGET; utility infrastructure and service capacity unapproved

WHY THIS IS NOT A BUILD RELEASE

Survey and verified parcel/title/setbacks are missing. No existing campus geometry is used as a base.

Concept members and assemblies are proposed. No foundation sizing, loading, connections, drainage, grading or mechanical design is approved.

Use these sheets to compare layouts and brief a contractor/design team. A licensed Tennessee team must produce coordinated sealed construction documents.

MODEL AUTHORITY

The attached native Blender and IFC files contain the dimensioned model. These vector sheets use that same geometric data; independent audits compare the data against the saved mesh and IFC.

WORLDWIDE STAGES

Butterfly / Central Sports Court

C1.01

DIMENSIONED SITE & MOVEMENT PLAN



40 m | printed scale 84.63 ft per inch

N*

*assumed north

LEGEND

Blue: main enclosed hall footprints. Grey: the one chosen parking system. Thin grey corridors: 24 ft / 7.315 m drives. Tan: protected pedestrian routes and service reservation. Green: separate 30-acre activity envelope.

Coordinate origin and north are assumed. All levels use design datum +0.000 m; surveyed grades are unknown.

Vehicle paths show connections, not verified swept paths or fire apparatus approval. Gates, exit quantities and turning radii require design review.

Public forecourts are retained ahead of halls. Loading routes are separated where possible; pedestrian crossings require final control details.


Stormwater gardens are land reservations. Storage volume and discharge levels require site drainage calculations.

SPORTS ADJACENCY

A physical 4.000 m shared walk separates soccer runoff and the nearest pickleball pad. Additional paths within the court group are retained. Soccer and pickleball do not share playing space.

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026

Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.

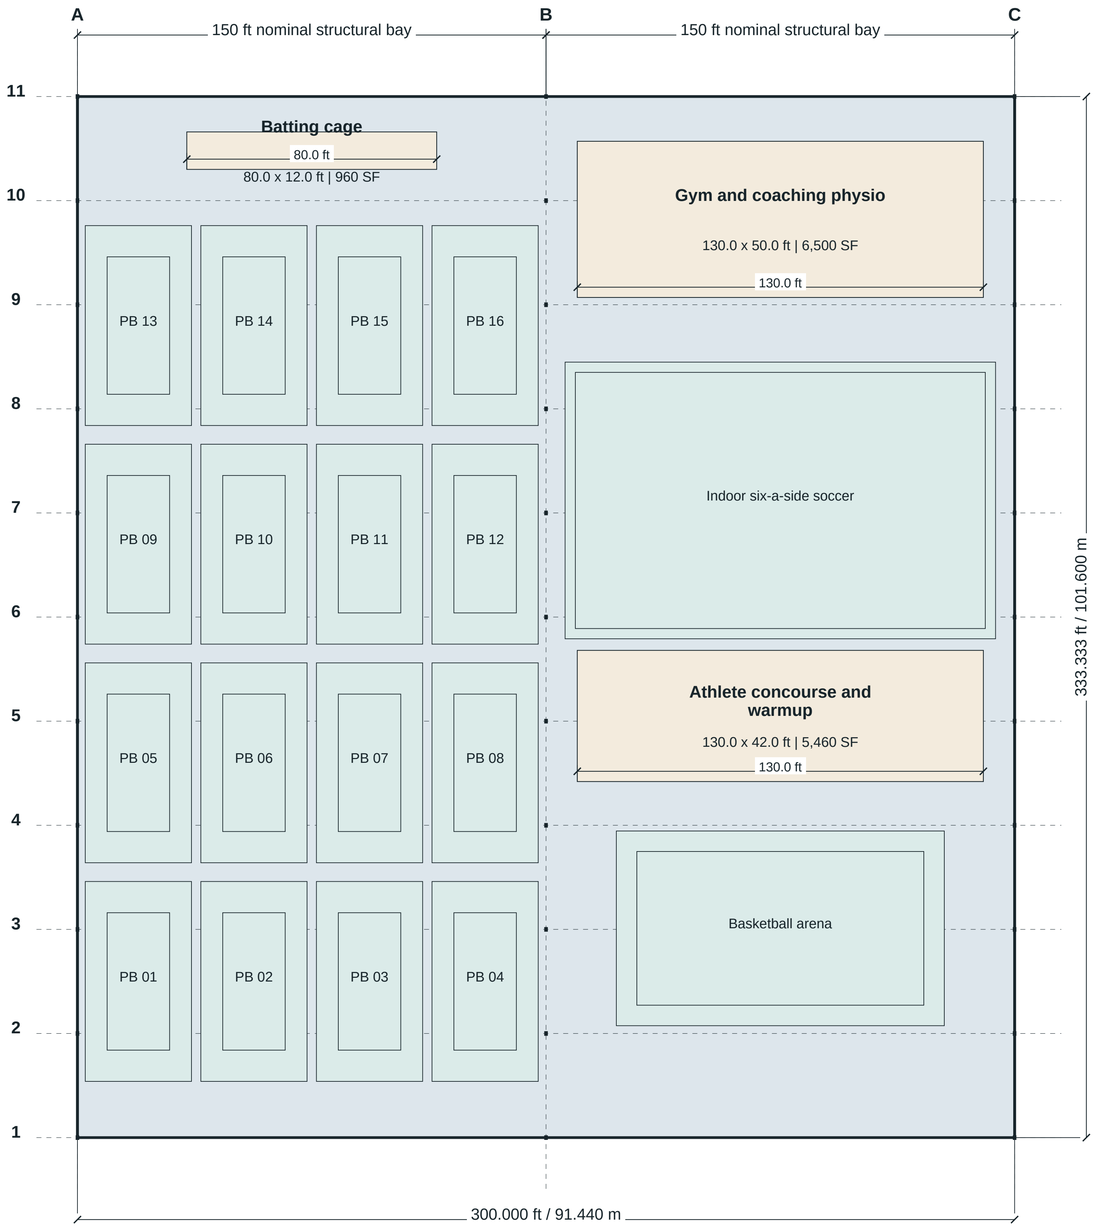

AREA & ROOM SCHEDULE

16 pickleball courts: 20 x 44 ft within 34 x 64 ft free zones.

Basketball: FIBA 28 x 15 m within 32 x 19 m free zone.

Six-a-side: proposed 40 x 25 m within 42 x 27 m free zone. Competition rules and rebound treatment unresolved.

Gym and coaching physio: 6,500 SF allocated

Batting cage: 960 SF allocated

Athlete concourse and warmup: 5,460 SF allocated

DOORS & FIT-OUT

Actual openings/fills are included in IFC walls. Front/rear entrance pairs, side exit and high service opening are shown. Door schedule is schematic; quantity, swing, fire rating and travel distances need code review.

D1 entrance: 8 ft x 9 ft. D2 service: 12 ft x 15 ft. D3 room door: 1.22 x 2.438 m. Accessibility/hardware/rating unresolved.

Court planes are native IFC layout annotations. Their graphical depth and Z offsets are not built floor steps or finish layers. Toilet/kitchen fittings are diagram allowances. 250 dining seats are measured.


Two 50,000 SF sections are defined by the structural bay line. The 150 ft nominal grid has 149.016 ft between proposed column faces. Room areas sit inside the 100,000 SF gross hall.

WORLDWIDE STAGES

Butterfly / Central Sports Court

A2.01

EVENTS HALL GROUND PLAN

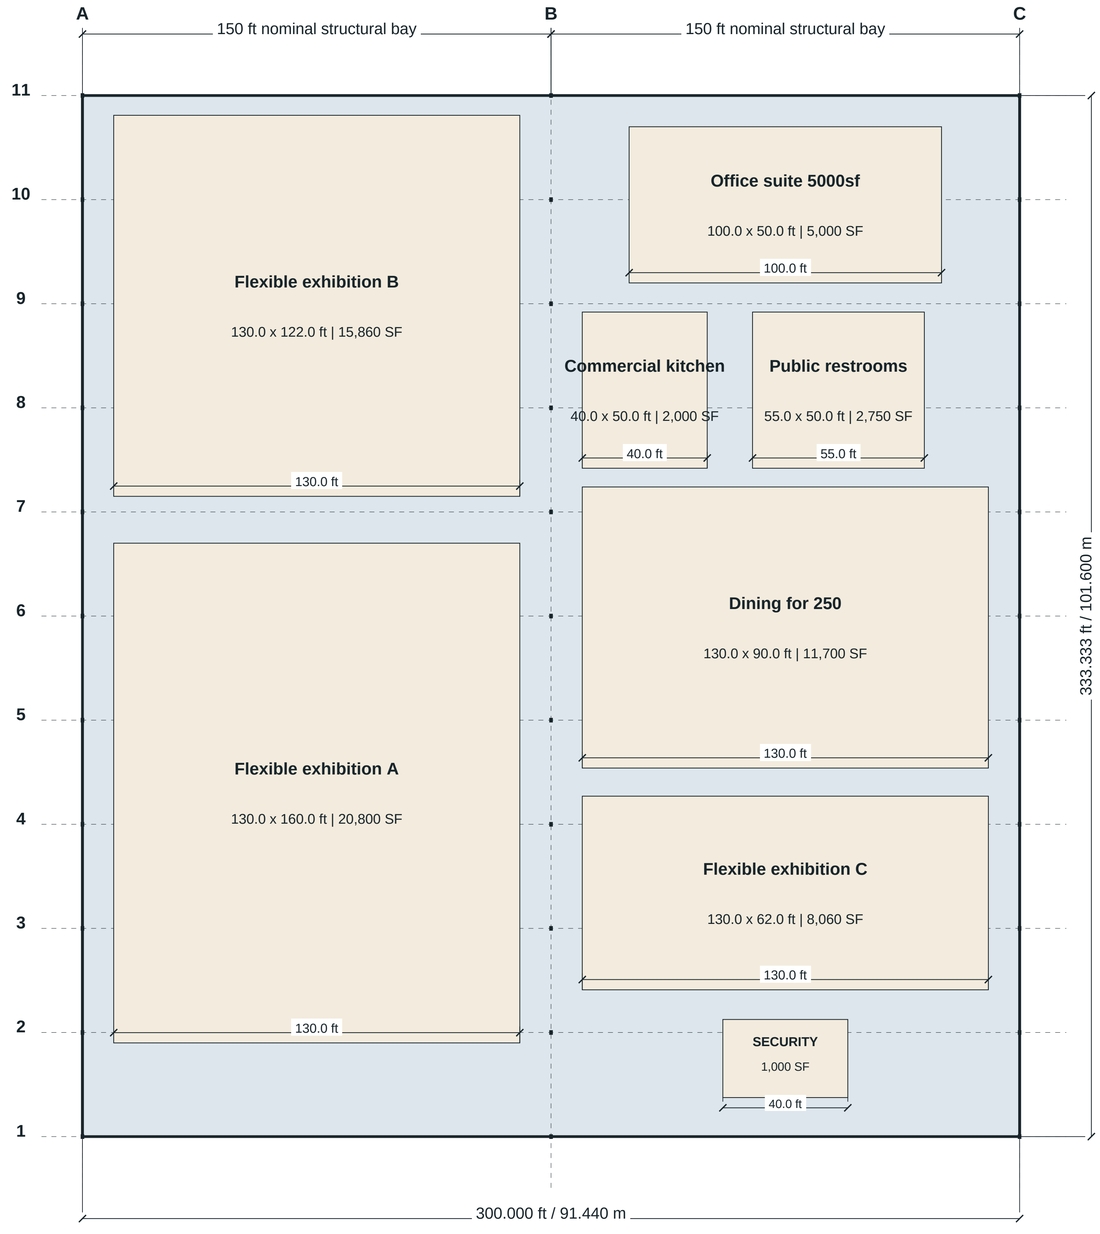

AREA & ROOM SCHEDULE

Flexible exhibition A: 20,800 SF allocated

Flexible exhibition B: 15,860 SF allocated

Flexible exhibition C: 8,060 SF allocated

Dining for 250: 11,700 SF allocated

Commercial kitchen: 2,000 SF allocated

Public restrooms: 2,750 SF allocated

Office suite 5000sf: 5,000 SF allocated

Security private entrance 1000sf: 1,000 SF allocated

DOORS & FIT-OUT

Actual openings/fills are included in IFC walls. Front/rear entrance pairs, side exit and high service opening are shown. Door schedule is schematic; quantity, swing, fire rating and travel distances need code review.


D1 entrance: 8 ft x 9 ft. D2 service: 12 ft x 15 ft. D3 room door: 1.22 x 2.438 m. Accessibility/hardware/rating unresolved.

Court planes are native IFC layout annotations. Their graphical depth and Z offsets are not built floor steps or finish layers. Toilet/kitchen fittings are diagram allowances. 250 dining seats are measured.

Two 50,000 SF sections are defined by the structural bay line. The 150 ft nominal grid has 149.016 ft between proposed column faces. Room areas sit inside the 100,000 SF gross hall.

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026

Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.

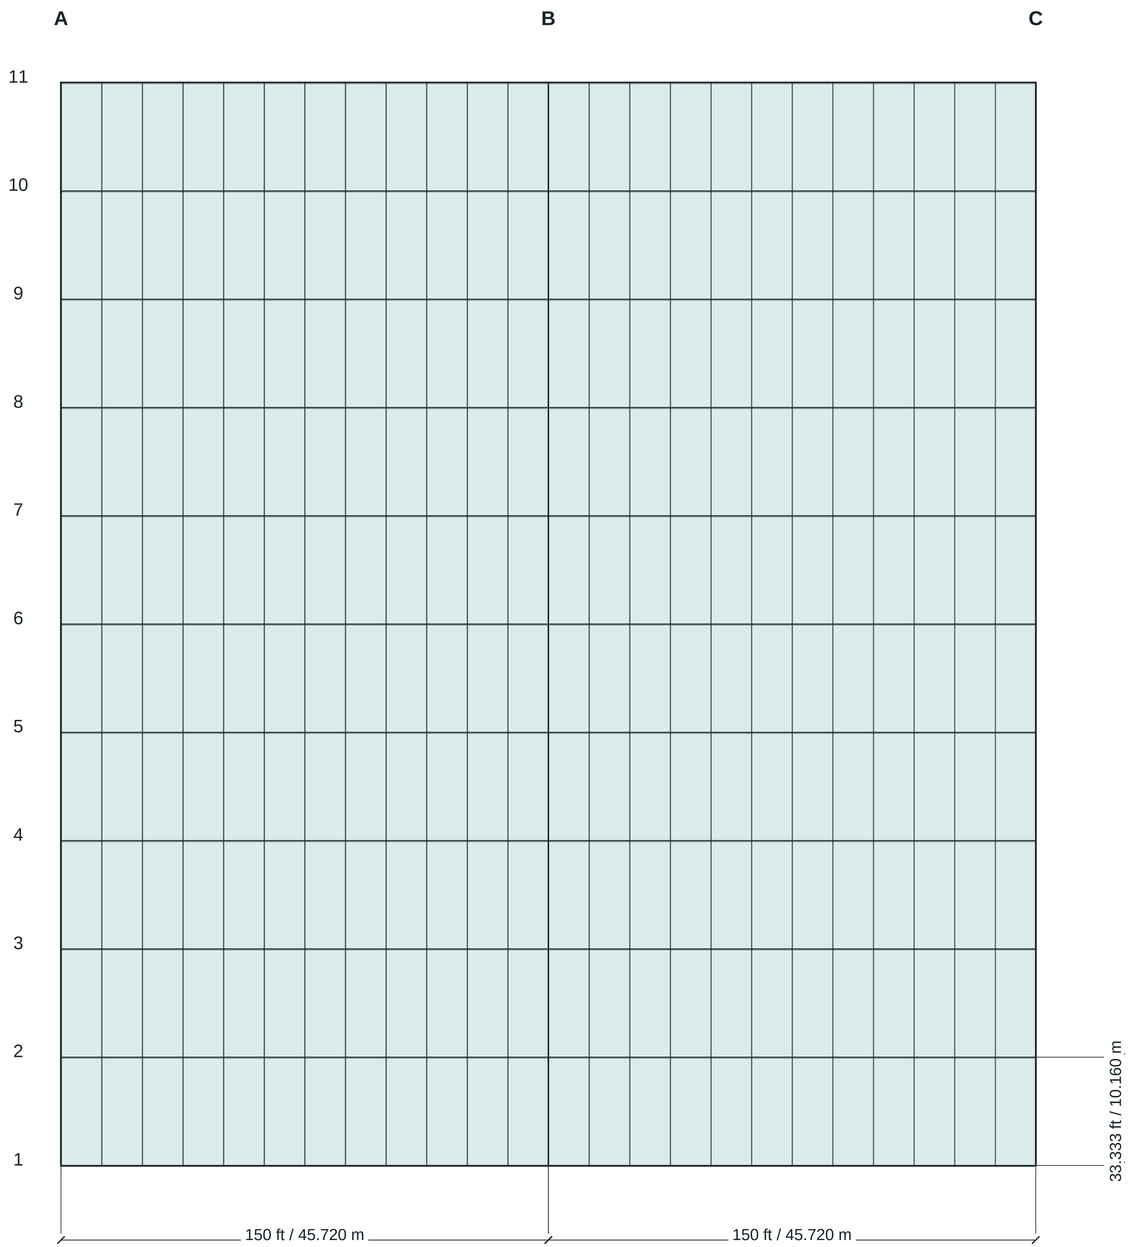

ROOF FAMILY

BUTTERFLY

Both halls use the shown roof family on the same underlying two-bay grid. Frames repeat at 10.160 m centers. Member profiles are native editable IFC extrusions.

The model shows geometry and a proposed load-path arrangement. It does not establish structural adequacy, vibration performance, stability, connection design, thermal movement or lateral loads.

PROPOSED PROFILE REGISTER

C1 hall column: 400 x 300 mm I-shaped section, 12 mm web / 18 mm flange.

Bottom chord: 400 x 200 mm I-shaped section; lowest modeled roof-member datum is coordinated to the 37 ft target.

Top chord: 350 x 180 mm I-shaped section, segmented to the roof profile.


Purlin: 220 x 100 mm I-shaped section in 10.160 m segments.

Web/lateral members: schematic square profile. No grade, capacity or connection is approved.


SL1 hall slab: proposed 200 mm; reinforcement, foundations, bearing and soil design omitted pending engineering.

W1 / R1: proposed insulated wall and standing-seam roof. Final layer specification, U-values, fire rating, waterproofing and drainage design pending.

01 | TRANSVERSE ROOF SECTION, TWO REPEATING BAYS

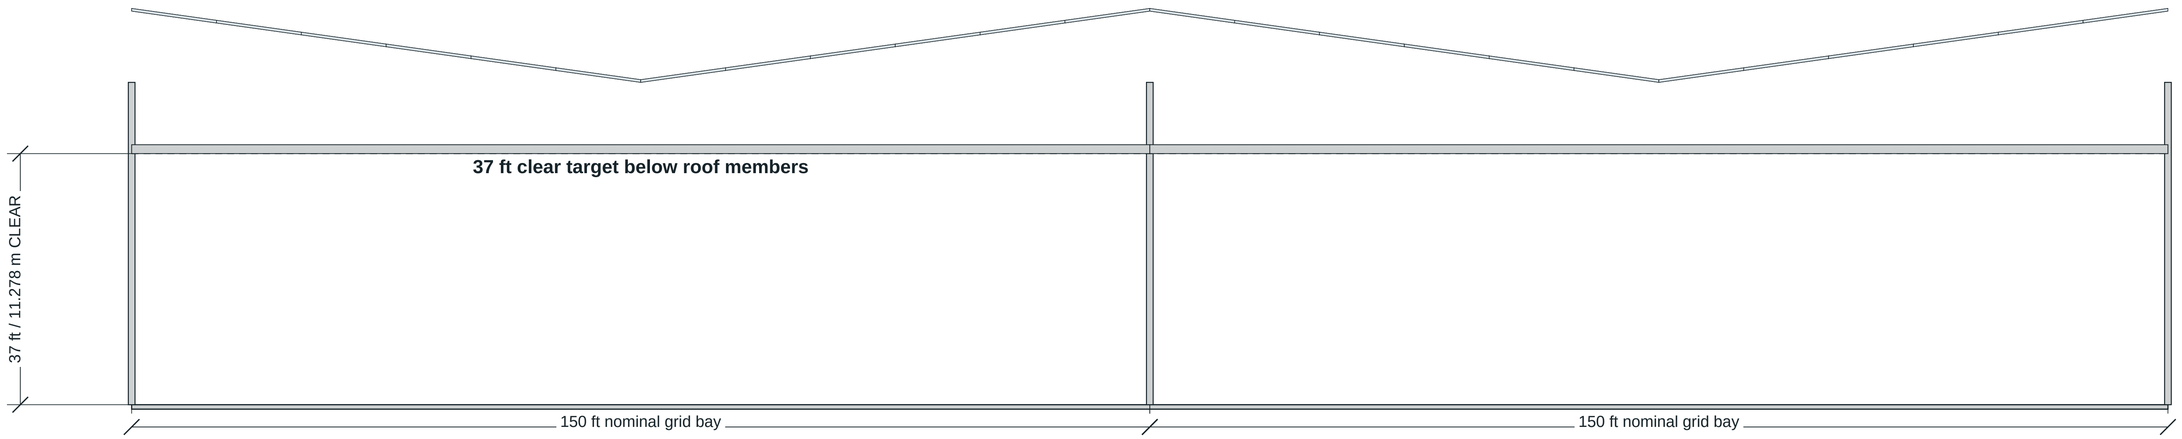

02 | LONGITUDINAL SECTION ENVELOPE

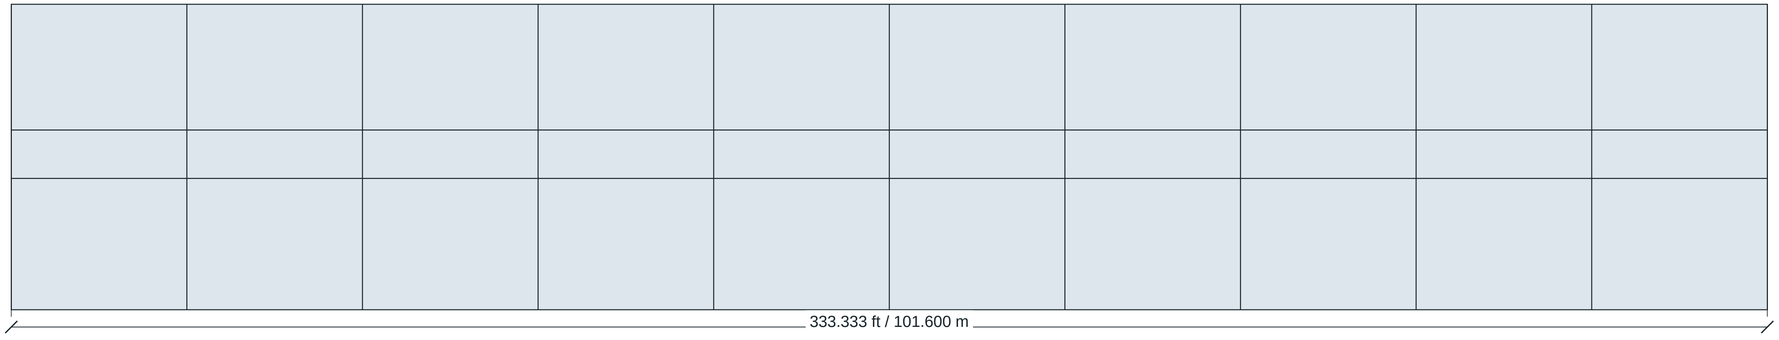


Elevations use the local hall coordinates and roof skin vertices from the exported model. Both hall bodies share the same dimensions; entrance canopies, roof families and garage architecture vary by option.


Roof joints, flashing, gutters/downpipes, waterproofing, glazing fixings, wall layers and member connections require engineered details. No invented detail is represented as a build instruction.

Final pad levels and soil bearing are unknown. Slab and footing design require geotechnical inputs, flood/drainage levels and structural loads.


01 | LOCAL FRONT FACADE | hall rotated 0 degrees on assumed site

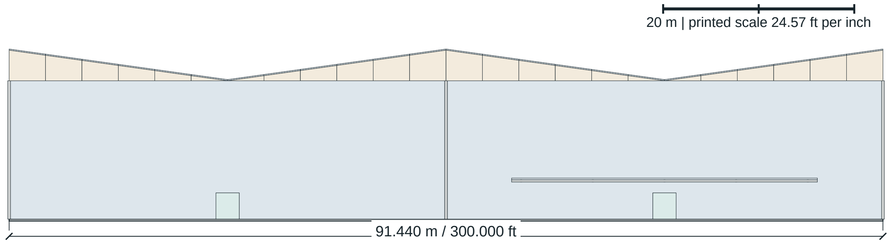


02 | LOCAL REAR FACADE | hall rotated 0 degrees on assumed site

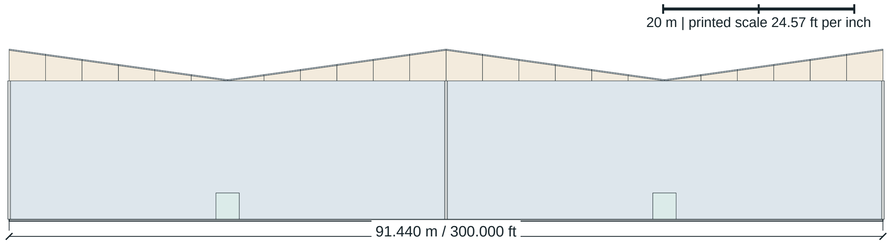

03 | LOCAL WEST FACADE | hall rotated 0 degrees on assumed site

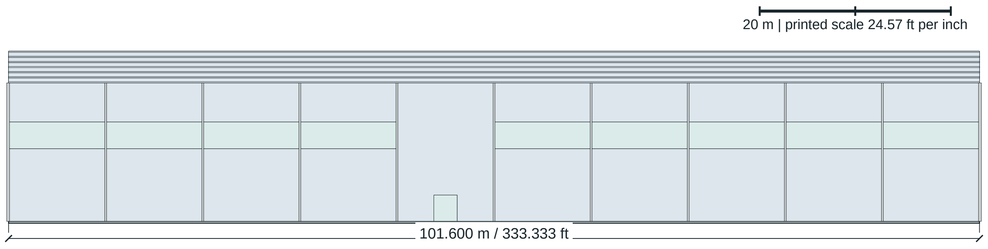


04 | LOCAL EAST FACADE | hall rotated 0 degrees on assumed site

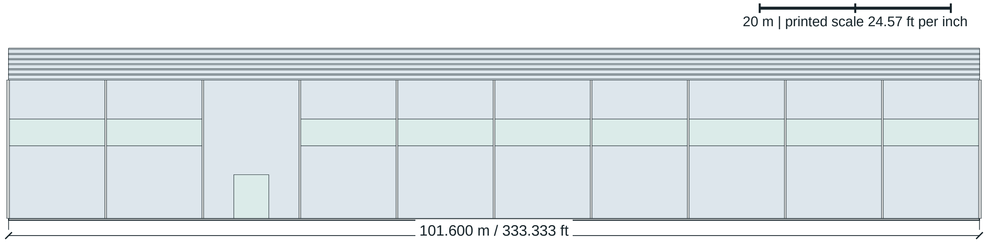


Orthographic projections use saved-model wall, curtain-wall, column, door, canopy and roof vertices. Local facade labels avoid implying verified geographic orientation.

Visible openings reflect the schematic model. Cladding/glazing joints, flashing, gutters, hardware, ratings and canopy connections require professional specification.


01 | LOCAL FRONT FACADE | hall rotated 0 degrees on assumed site

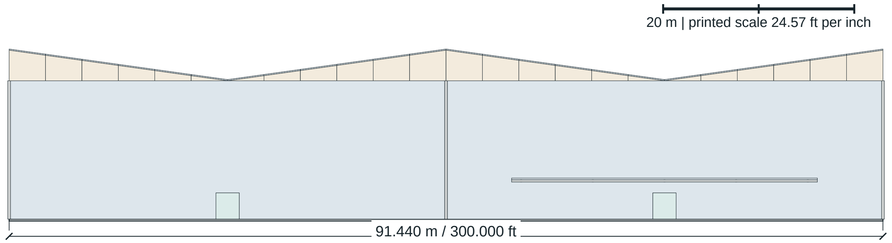


02 | LOCAL REAR FACADE | hall rotated 0 degrees on assumed site

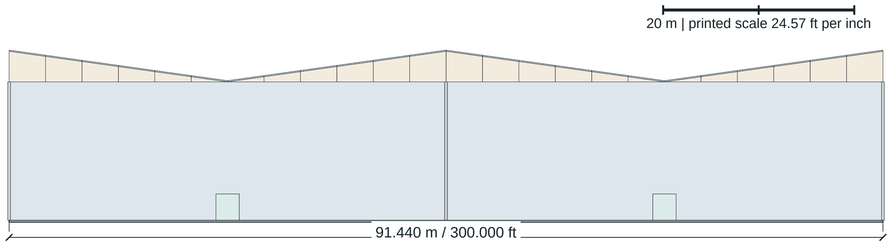

03 | LOCAL WEST FACADE | hall rotated 0 degrees on assumed site

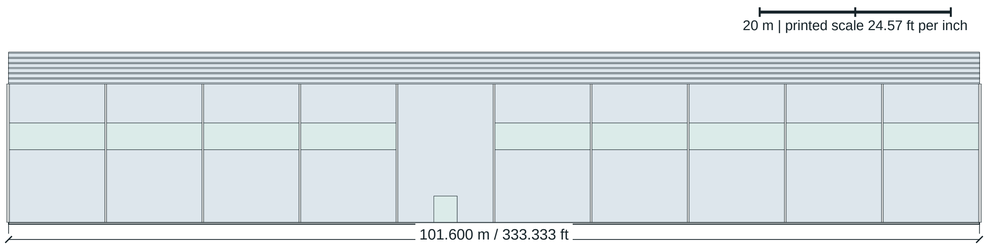


04 | LOCAL EAST FACADE | hall rotated 0 degrees on assumed site

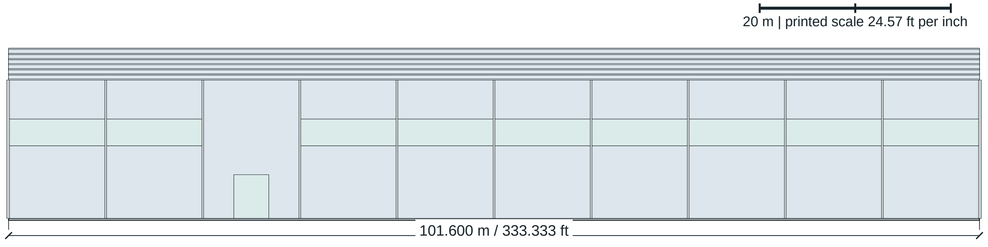

Orthographic projections use saved-model wall, curtain-wall, column, door, canopy and roof vertices. Local facade labels avoid implying verified geographic orientation.

Visible openings reflect the schematic model. Cladding/glazing joints, flashing, gutters, hardware, ratings and canopy connections require professional specification.

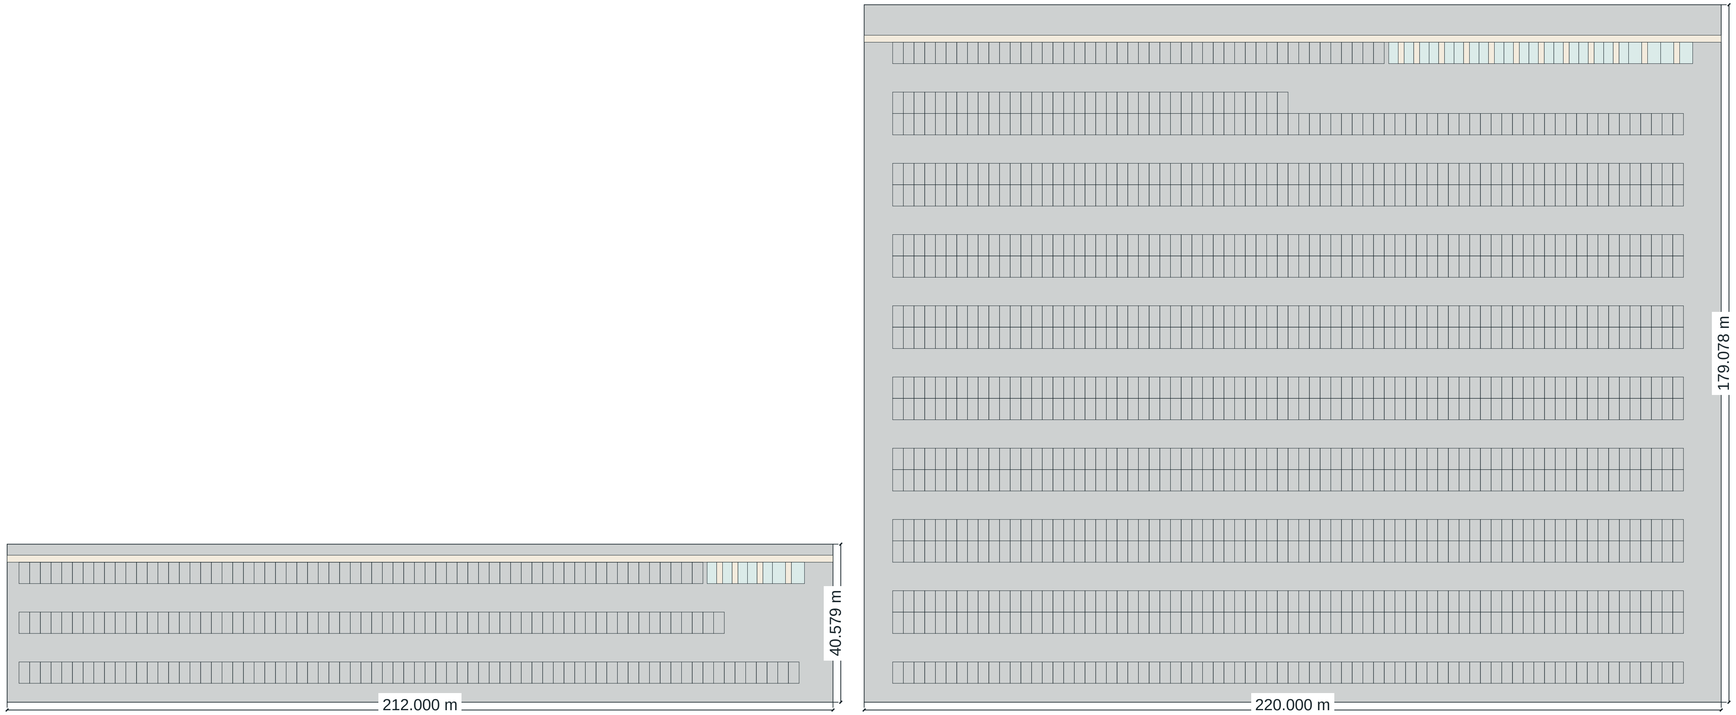

MEASURED PARKING

option-05-lot-1: 1290 spaces; 23 accessible; 4 van.

option-05-lot-2: 210 spaces; 7 accessible; 2 van.

Standard stall: 9 x 18 ft.

Two-way aisle: 24 ft.

Accessible car stall: 8 ft. Van stall: 11 ft. Adjacent access aisle: 5 ft.

ISA and VAN ACCESSIBLE signs are actual visible geometry; mounting and final sign details require review.

Flush protected rear walks connect the reserved accessible bays. Surveyed grades and shortest-route/entrance crossing review remain unresolved.

DIMENSIONED COORDINATION DETAILS

SPORTS WALK	4.000 m clear gap outside soccer runoff and the nearest pickleball free pad. Soccer pitch105 x68 m with3 m clear runoff.
PICKLEBALL MODULE	Playing20 x44 ft;34 x64 ft pad. Inter-pad protected walks2 m nominal. No route crosses another playing court.
PARKING ROW	18 ft stall +24 ft two-way aisle +18 ft stall =60 ft module. Actual stall count accounts for aisles, access bays and end drives.
PUBLIC CIRCULATION	24 ft two-way drives;2.4 to 3 m principal pedestrian corridors; 1.22 m door links. No surveyed vertical profile or fire-apparatus turning envelope is supplied.
POWER RESERVATION	Five diagram equipment boxes reserve space for a20 MW utility target; ratings/capacity, utility ownership, clearances, feeders and substations unapproved.

INFORMATION REQUIRED BEFORE CONSTRUCTION DRAWINGS

1. Confirmed parcel, boundary/title/setbacks and a current boundary/topographic survey. Establish exact relation to the existing campus without importing it into these alternatives.
2. Geotechnical/flood/karst investigation, levels, soil bearing, retaining-wall and foundation strategy.
3. Civil drainage/SWPPP, disturbed acreage, utility easements, access permits and city water/sewer allocation confirmation.
4. Structural loads, member selection, deflection/vibration, fire resistance, foundations, connections and lateral stability.
5. Approved occupancies, event crowd plan, exits/travel distances, fire access, sprinkler/alarm strategy and full accessibility review.
6. HVAC, plumbing/fixture count, commercial kitchen ventilation,20 MW utility capacity, one-line electrical design and backup/lighting controls.
7. Confirmed budget and procurement scope. Licensed Tennessee design team prepares and seals coordinated permit/bid/construction documents.

PRIMARY REFERENCES CONSULTED

Spring Hill commercial construction checklist

Spring Hill civil engineering checklist

US Access Board parking guidance