WORLDWIDE STAGES

Six layouts | contractor planning comparison

G0.00

SIX SITE & BUILDING ALTERNATIVES

option-01 | Twin Gables / Cross-Axis Park

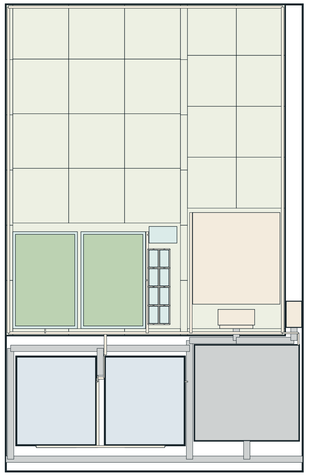

dual gable

44.948 acres | 1,500 spaces | garage only

option-02 | Northlight / Garden Hinge

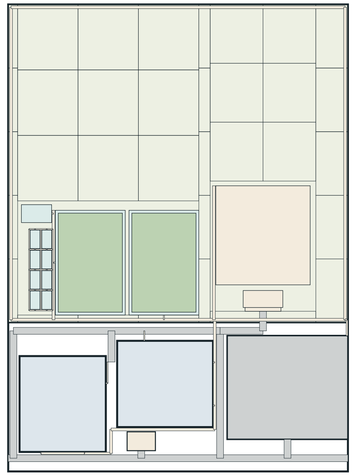

northlight sawtooth

44.034 acres | 1,500 spaces | garage only

option-03 | Bowstring / Terraced Park

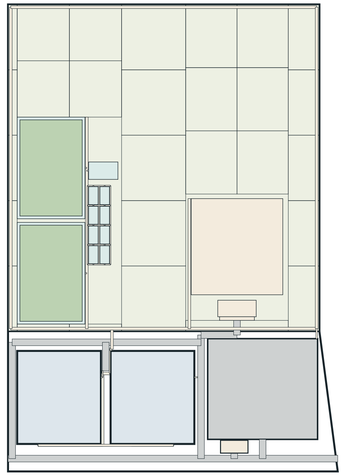

bowstring

43.226 acres | 1,500 spaces | garage only

option-04 | Solar Bars / Southern Parking

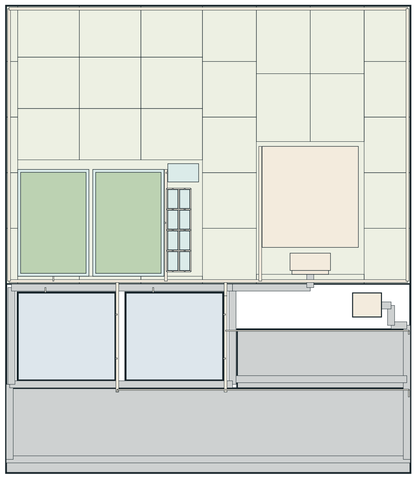

flat truss solar

50.377 acres | 1,500 spaces | surface only

option-05 | Butterfly / Central Sports Court

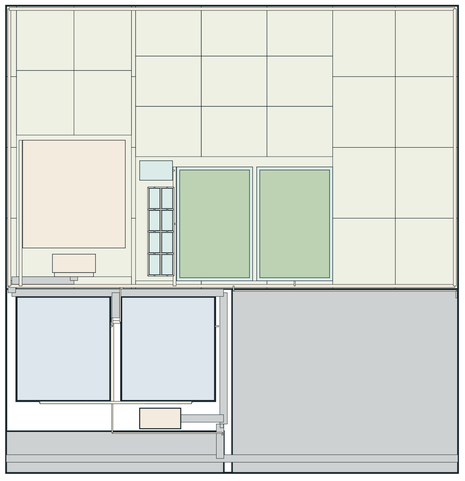

butterfly

49.470 acres | 1,500 spaces | surface only

option-06 | Clerestory / Ridgeline Park

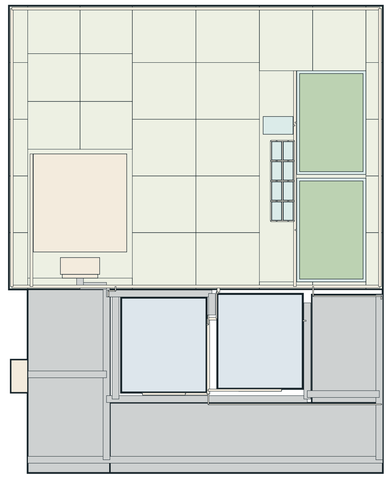

stepped clerestory

48.606 acres | 1,500 spaces | surface only

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026

Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.

SAME PROGRAM, SIX DISTINCT BUILDING AND SITE COMPOSITIONS

option-01 | Twin Gables / Cross-Axis Park	Parallel compact halls with a short shared runnel and outdoor fields directly behind the sports hall. 44.948 acres; dual gable; garage parking.
option-02 | Northlight / Garden Hinge	Turned event hall creates a hospitality hinge; timber-grid garage sits beside the entrance. 44.034 acres; northlight sawtooth; garage parking.
option-03 | Bowstring / Terraced Park	Stacked full pitches free a broad quarry-and-water court beside a compact event bowl. 43.226 acres; bowstring; garage parking.
option-04 | Solar Bars / Southern Parking	Two transverse hall bars face the activity park; one southern surface field has a compact east annex. 50.377 acres; flat truss solar; surface parking.
option-05 | Butterfly / Central Sports Court	A central outdoor sports cluster faces both halls; gardens and water occupy both park wings. 49.470 acres; butterfly; surface parking.
option-06 | Clerestory / Ridgeline Park	Offset halls and a narrow western site arm form a ridgeline composition; courts hug the stacked pitches. 48.606 acres; stepped clerestory; surface parking.

Garage alternatives use less ground for parking but require a five-level structure, ramps, stairs and lift provision. Surface alternatives spread the same1,500 actual stalls into separate clearly scoped lots. Neither option includes a second parking type.

All six retain200,000 SF,24 pickleball courts,2 outdoor soccer pitches,30 outdoor activity acres,250 dining seats and the20 MW target. The4 m sports adjacency removes the unused gap raised by Hugo.

These are design comparisons, not cost forecasts. Contractor pricing requires a confirmed survey, budget, engineering, utility allocation and approved occupancies.